

LANDPACK

佛山市揽德包装机械有限公司

FOSHAN LAND PACKAGING MACHINERY CO.,LTD



枕式机画册
FLOW PACKING MACHINE PICTURE ALBUM

佛山市揽德包装机械有限公司
FOSHAN LAND PACKAGING MACHINERY CO.,LTD

📍 地址：佛山市南海区罗村新光源产业基地C7栋
Add : Building C7 of New Lighting Source Industrial Base,
Luocun,Nanhai District,Foshan City,GD,China

☎ Tel : 0757-81807872 Fax : 0757-81807758

✉ E-mail : yang@landpacking.com

🌐 Web : www.landpack.cn / www.landpack.com





公司简介 Company profile

揽德包装机械有限公司坐落于广东省佛山市，以其优越的地理位置和良好的市场口碑，赢得广大客户的支持。公司销售网络辐射全国各地，远销全球30多个国家和地区。

本公司是研发、制造和销售各种液体灌装机、颗粒灌装机、粉末灌装机、封口机、封尾机和贴标机等相关设备,并提供全自动包装生产线整线设计和整体解决方案的现代化包装设备企业。

公司通过ISO9001质量管理体系认证,相关设备通过CE、SGS等认证。配备有丰富经验的研发、制造工程师队伍和专业的销售服务团队,确保您用合理的成本,获得性能稳定,外观卓越和人性化程度高的设备和优质满意的服务体验。

设备广泛适用于食品、中药材、饮料和农产品等相关行业的产品包装和各种制罐厂的生产中。

揽德包装机作为国内先进包装设备制造厂商，致力于为企业 提供包装整体解决方案，令企业所需包装的过程得到质的提升，最大限度地解放了劳动力，避免了二次污染，以高效的方式提高企业的生产率。

LANDPACKAGING MACHINERY CO., LTD. IS LOCATED IN FOSHAN CITY, GUANGDONG PROVINCE. WITH ITS SUPERIOR GEOGRAPHICAL LOCATION AND GOOD MARKET REPUTATION, IT HAS WON THE SUPPORT OF CUSTOMERS. THE COMPANY'S SALES NETWORK RADIATES ALL OVER THE COUNTRY AND IS EXPORTED TO MORE THAN 30 COUNTRIES AND REGIONS AROUND THE WORLD.

THE COMPANY IS A MODERN PACKAGING EQUIPMENT ENTERPRISE WHICH DEVELOPS, MANUFACTURES AND SELLS ALL KINDS OF LIQUID FILLING MACHINES, PARTICLE FILLING MACHINES, POWDER FILLING MACHINES, SEALING MACHINES, TAIL SEALING MACHINES AND LABELING MACHINES, AND PROVIDES FULL-AUTOMATIC PACKAGING PRODUCTION LINE DESIGN AND OVERALL SOLUTIONS.

THE COMPANY HAS PASSED ISO 9001 QUALITY MANAGEMENT SYSTEM CERTIFICATION, AND RELEVANT EQUIPMENT HAS PASSED CE AND SGS CERTIFICATION. EQUIPPED WITH A TEAM OF EXPERIENCED R & D AND MANUFACTURING ENGINEERS AND A PROFESSIONAL SALES AND SERVICE TEAM, YOU CAN GET STABLE PERFORMANCE, EXCELLENT APPEARANCE AND HIGH DEGREE OF HUMANIZATION EQUIPMENT AND HIGH QUALITY AND SATISFACTORY SERVICE EXPERIENCE AT REASONABLE COST.

THE EQUIPMENT IS WIDELY USED IN FOOD, CHINESE HERBAL MEDICINE, BEVERAGE, AGRICULTURAL PRODUCTS AND OTHER RELATED INDUSTRIES OF PRODUCT PACKAGING AND VARIOUS CANNERY PRODUCTION.



CE 认证



ISO 认证



SGS 认证



TUV 认证



专利证书

LP 系列枕式机下走纸+标准+三伺服

Flow packing machine(down paper)+ standard + three servos

LP-250X/LP-350X/LP-450X/LP-600X/LP-700X/LP-800X/LP-900X



(一) 应用范围

- 毛巾, 纸巾, 挂面, 蛋卷, 香肠, 冰棒, 软糖, 饼干, 鲜果等柔软状, 长条状, 散装物的包装

(二) 主要性能和结构特点

- 三伺服控制, 袋长即设即切, 无需调节空走, 一步到位, 省时省膜。
- 人机界面, 参数设定方便快捷。
- 故障自诊功能, 故障显示一目了然。
- 高敏感度光电眼色标跟踪, 数字化输入封切位置, 使封切位置更加准确。
- 温度独立PID控制, 更适合各种包装材质。
- 定位停机功能, 不粘刀, 不浪费包装膜。
- 传动系统简洁, 工作更可靠, 维护保养更方便。
- 所有控制由软件实现, 方便功能调整和技术升级, 永不落后。

Applications

- Packaging various kinds of regular objects like biscuits, pies, chocolates, bread, instant, noodles, moon-cakes, drugs, daily applications, industrial parts, paper boxes, tray. Etc.

Features

- Three servo motor control, Bag length can be set and cut in one step, saving time and film.
- Interface features easy and quick setting and operation. Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software, easy for function adjusting and technical upgrade.

包装机参数

枕式机选配装置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag



(三) 技术规格 Specifications

机 型 (Type)	LP-250X	LP-350X	LP-450X	LP-600X	LP-700X	LP-800X	LP-900X
薄膜宽度 (Film width)	Max.250mm	Max.350mm	Max.450mm	Max.600mm	Max.700mm	Max.800mm	Max.900mm
制袋长度 (Bag length)	65-190mm or 120-280mm	90-220mm or 150-330mm	150-450mm	160-500mm	180-600mm	210-650mm	240-700mm
制袋宽度 (Bag width)	30-110mm	50-160mm	50-180mm	100-280mm	100-330mm	120-350mm	150-400mm
产品高度 (Product height)	Max.45mm	Max.65mm	Max.80mm	Max.110mm	Max.110mm	Max.130mm	Max.150mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm
包装速度 (Packaging rate)	40-230 bags/min	40-230 bags/min	40-150 bags/min	20-150 bags/min	20-130 bags/min	20-120 bags/min	20-100 bags/min
电源规格 (Power)	220V,50/60Hz,2.6kw	220V,50/60Hz,2.6kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,4.5kw	220V,50/60Hz,4.5kw
机器尺寸 (Machine size)	(L)3920*(W)670*(H)1320mm	(L)3920*(W)670*(H)1320mm	(L)4150*(W)820*(H)1450mm	(L)4300*(W)920*(H)1460mm	(L)4380*(W)980*(H)1480mm	(L)4100*(W)1170*(H)1550mm	(L)4300*(W)1270*(H)1550mm
机器质量 (Machine quality)	About 500kg	About 550kg	About 650kg	About 680kg	About 720kg	About 800kg	About 850kg
备 注 (Remarks)	可加充气装置 (optional air filling device) / 插角装置 (optional angle folding)						
包装材质 (Film material)	OPP、PE、PVC、OPP/PP、PT/PE、KOP/PP镀铝膜、铝膜						

(四) 包装样品展示 Packaging samples show



LP 系列枕式机上走纸+标准+三伺服

Flow packing machine(up paper)+ standard + three servos

LP-250B/LP-350B/LP-450B/LP-600B/LP-700B/LP-800B/LP-900B



(一) 应用范围

- 饼干, 米通, 雪饼, 蛋黄派, 巧克力, 面包, 方便面, 月饼, 蔬菜瓜果, 药品, 日用品, 工业零件, 纸盒或托盘等各类有规则物体的包装。

(二) 主要性能和结构特点

- 双变频控制, 袋长即设即切, 无需调节空走, 一步到位, 省时省膜。
- 人机界面, 参数设定方便快捷。
- 故障自诊功能, 故障显示一目了然。
- 高敏感度光电眼色标跟踪, 数字化输入封切位置, 使封切位置更加准确。
- 温度独立PID 控制, 更适合各种包装材质。
- 定位停机功能, 不粘刀, 不浪费包装膜。
- 传动系统简洁, 工作更可靠, 维护保养更方便。
- 所有控制由软件实现, 方便功能调整和技术升级, 永不落后。

Applications

- Packaging various kinds of regular objects like biscuits, pies, chocolates, bread, instant, noodles, moon-cakes, drugs, daily applications, industrial parts, paper boxes, tray. Etc.

Features

- Dual frequency conversion control, Bag length can be set and cut in one step, saving time and film.
- Interface features easy and quick setting and operation. Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software, easy for function adjusting and technical upgrade.

包装机参数

枕式机选配置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag

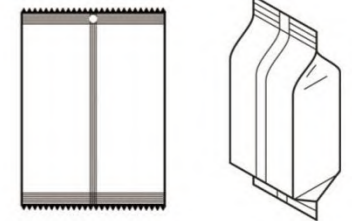

(三) 技术规格 Specifications

机 型 (Type)	LP-250B	LP-350B	LP-450B	LP-600B	LP-700B	LP-800B	LP-900B
薄膜宽度 (Film width)	Max.250mm	Max.350mm	Max.450mm	Max.600mm	Max.700mm	Max.800mm	Max.900mm
制袋长度 (Bag length)	65-190mm or 120-280mm	90-220mm or 150-280mm	150-450mm	160-500mm	180-600 mm	210-650mm	240-700mm
制袋宽度 (Bag width)	30-110mm	50-160mm	50-180mm	100-280mm	100-330 mm	120-350mm	150-400mm
产品高度 (Product height)	Max.40mm	Max.40mm	Max.75mm	Max.110mm	Max.110mm	Max.130mm	Max.150mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm
包装速度 (Packaging rate)	40-230 bags/min	40-180 bags/min	30-150 bags/min	20-150 bags/min	20-130 bags/min	20-120 bags/min	20-100 bags/min
电源规格 (Power)	220V,50/60Hz,2.4kw	220V,50/60Hz,2.6kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,4.5kw	220V,50/60Hz,4.5kw
机器尺寸 (Machine size)	(L)3770*(W)720*(H)1420mm	(L)4030*(W)770*(H)1420mm	(L)4030*(W)820*(H)1420mm	(L)4030*(W)970*(H)1500mm	(L)4030*(W)980*(H)1500mm	(L)4100*(W)1170*(H)1550mm	(L)4300*(W)1270*(H)1550mm
机器质量 (Machine quality)	About 500kg	About 580kg	About 650kg	About 680kg	About 720kg	About 800kg	About 850kg
备 注 (Remarks)	可加充气装置 (optional air filling device) / 插角装置 (optional angle folding)						
包装材质 (Film material)	OPP、PE、PVC、OPP/PP、PT/PE、KOP/PP镀铝膜、铝膜						


(四) 包装样品展示 Packaging samples show



LP 系列枕式机下走纸+标准+双变频

Flow packing machine(down paper)+ standard + frequency

LP-250X/LP-350X/LP-450X/LP-600X/LP-700X/LP-800X/LP-900X

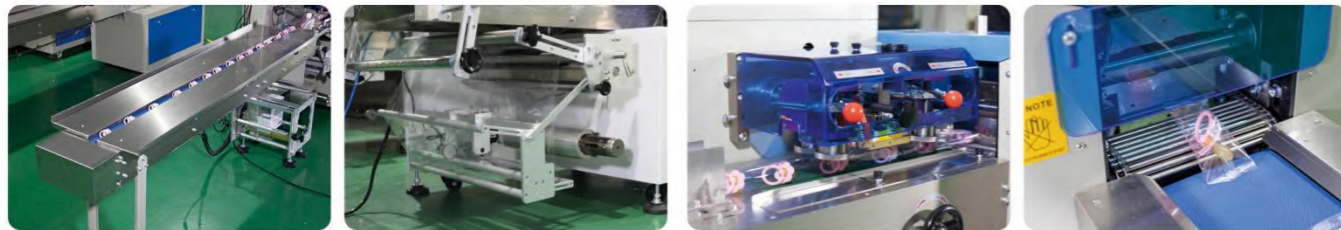

(一) 应用范围

- 毛巾, 纸巾, 挂面, 蛋卷, 香肠, 冰棒, 软糖, 饼干, 鲜果等柔软状, 长条状, 散装物的包装。

(二) 主要性能和结构特点

- 三伺服控制, 袋长即设即切, 无需调节空走, 一步到位, 省时省膜。
- 人机界面, 参数设定方便快捷。
- 故障自诊功能, 故障显示一目了然。
- 高敏感度光电眼色标跟踪, 数字化输入封切位置, 使封切位置更加准确。
- 温度独立PID 控制, 更适合各种包装材质。
- 定位停机功能, 不粘刀, 不浪费包装膜。
- 传动系统简洁, 工作更可靠, 维护保养更方便。
- 所有控制由软件实现, 方便功能调整和技术升级, 永不落后。

Applications

- Packaging various kinds of regular objects like biscuits, pies, chocolates, bread, instant, noodles, moon-cakes, drugs, daily applications, industrial parts, paper boxes, tray. Etc.

Features

- Three servo motor control, Bag length can be set and cut in one step, saving time and film.
- Interface features easy and quick setting and operation. Self failure diagnosis, clear failure display
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software, easy for function adjusting and technical upgrade.

包装机参数

枕式机选配置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag

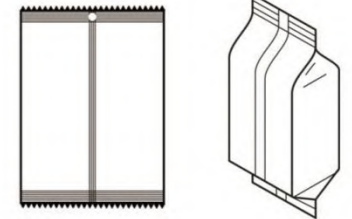

(三) 技术规格 Specifications

机 型 (Type)	LP-250X	LP-350X	LP-450X	LP-600X	LP-700X	LP-800X	LP-900X
薄膜宽度 (Film width)	Max.250mm	Max.350mm	Max.450mm	Max.600mm	Max.700mm	Max.800mm	Max.900mm
制袋长度 (Bag length)	65-190mm or 120-280mm	90-220mm or 150-330mm	150-450mm	160-500mm	180-600 mm	210-650mm	240-700mm
制袋宽度 (Bag width)	30-110mm	50-160mm	50-180mm	100-280mm	100-330 mm	120-350mm	150-400mm
产品高度 (Product height)	Max.45mm	Max.65mm	Max.80mm	Max.110mm	Max.110mm	Max.130mm	Max.150mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm
包装速度 (Packaging rate)	40-230 bags/min	40-230 bags/min	40-150 bags/min	20-150 bags/min	20-130 bags/min	20-120 bags/min	20-100 bags/min
电源规格 (Power)	220V,50/60Hz,2.6kw	220V,50/60Hz,2.6kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,4.5kw	220V,50/60Hz,4.5kw
机器尺寸 (Machine size)	(L)3920*(W)670*(H)1320mm	(L)3920*(W)670*(H)1320mm	(L)4150*(W)820*(H)1450mm	(L)4300*(W)920*(H)1460mm	(L)4380*(W)980*(H)1480mm	(L)4100*(W)1170*(H)1550mm	(L)4300*(W)1270*(H)1550mm
机器质量 (Machine quality)	About 500kg	About 550kg	About 650kg	About 680kg	About 720kg	About 800kg	About 850kg
备 注 (Remarks)	可加充气装置 (optional air filling device) / 插角装置 (optional angle folding)						
包装材质 (Film material)	OPP、PE、PVC、OPP/PP、PT/PE、KOP/PP镀铝膜、铝膜						

(四) 包装样品展示 Packaging samples show



LP 系列枕式机上走纸+标准+双变频

Flow packing machine(up paper)+ standard + frequency

LP-250B/LP-350B/LP-450B/LP-600B/LP-700B/LP-800B/LP-900B



(一) 应用范围

- 饼干, 米通, 雪饼, 蛋黄派, 巧克力, 面包, 方便面, 月饼, 蔬菜瓜果, 药品, 日用品, 工业零件, 纸盒或托盘等各类有规则物体的包装。

(二) 主要性能和结构特点

- 双变频控制, 袋长即设即切, 无需调节空走, 一步到位, 省时省膜。
- 人机界面, 参数设定方便快捷。
- 故障自诊功能, 故障显示一目了然。
- 高敏感度光电眼色标跟踪, 数字化输入封切位置, 使封切位置更加准确。
- 温度独立PID 控制, 更好适合各种包装材质。
- 定位停机功能, 不粘刀, 不浪费包装膜。
- 传动系统简洁, 工作更可靠, 维护保养更方便。
- 所有控制由软件实现, 方便功能调整和技术升级, 永不落后。

Applications

- Packaging various kinds of regular objects like biscuits, pies, chocolates, bread, instant, noodles, moon-cakes, drugs, daily applications, industrial parts, paper boxes, tray. Etc.

Features

- Dual frequency conversion control, Bag length can be set and cut in one step, saving time and film.
- Interface features easy and quick setting and operation. Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software, easy for function adjusting and technical upgrade.

包装机参数

枕式机选配置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag

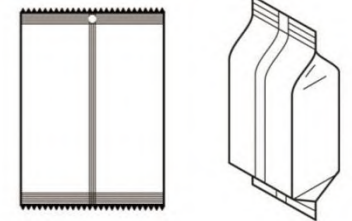

(三) 技术规格 Specifications

机 型 (Type)	LP-250B	LP-350B	LP-450B	LP-600B	LP-700B	LP-800B	LP-900B
薄膜宽度 (Film width)	Max.250mm	Max.350mm	Max.450mm	Max.600mm	Max.700mm	Max.800mm	Max.900mm
制袋长度 (Bag length)	65-190mm or 120-280mm	65-190mm or 120-280mm	150-450mm	160-500mm	180-600 mm	210-650mm	240-700mm
制袋宽度 (Bag width)	30-110mm	50-160mm	50-180mm	100-280mm	100-330 mm	120-350mm	150-400mm
产品高度 (Product height)	Max.40mm	Max.40mm	Max.75mm	Max.110mm	Max.110mm	Max.130mm	Max.150mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm
包装速度 (Packaging rate)	40-230 bags/min	40-180 bags/min	30-150 bags/min	20-150 bags/min	20-130 bags/min	20-120 bags/min	20-100 bags/min
电源规格 (Power)	220V,50/60Hz,2.4kw	220V,50/60Hz,2.6kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,4.5kw	220V,50/60Hz,4.5kw
机器尺寸 (Machine size)	(L)3770*(W)720*(H)1420mm	(L)4030*(W)770*(H)1420mm	(L)4030*(W)820*(H)1420mm	(L)4030*(W)970*(H)1500mm	(L)4030*(W)980*(H)1500mm	(L)4100*(W)1170*(H)1550mm	(L)4300*(W)1270*(H)1550mm
机器质量 (Machine quality)	About 500kg	About 580kg	About 650kg	About 680kg	About 720kg	About 800kg	About 850kg
备 注 (Remarks)	可加充气装置 (optional air filling device) / 插角装置 (optional angle folding)						
包装材质 (Film material)	OPP、PE、PVC、OPP/PP、PT/PE、KOP/PP镀铝膜、铝膜						

(四) 包装样品展示 Packaging samples show



LP 系列枕式蔬菜包装机

Vegetable flow packaging machine

LP-450X/LP-600X/LP-700X/LP-800X/LP-900X



(一) 应用范围

- 菜叶类蔬菜，胡萝卜，玉米，番薯，香蕉等果蔬类包装。

(二) 主要性能和结构特点

- 三伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
- 机器自动根据产品的长度调节封切的距离，实现不定长切的功能。
- 人机界面，参数设定方便快捷。
- 故障自诊功能，故障显示一目了然。
- 高敏感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
- 温度独立PID控制，更适合各种包装材质。
- 定位停机功能，不粘刀，不浪费包装膜。
- 传动系统简洁，工作更可靠，维护保养更方便。
- 所有控制由软件实现，方便功能调整和技术升级，永不落后。

Applications

- Packaging various kinds of leaves vegetable , corns, carrots, banana.

Features

- Three servo motor control, Bag length can be set and cut in one step,saving time and film.
- The machine can seal bag based on the products length changing automatically.
- Interface features easy and quick setting and operation.
- Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software,easy for function adjusting and technical upgrade.

包装机参数

枕式机选配置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式
Type of bag



(三) 技术规格 Specifications

机 型 (Type)	LP-450X	LP-600X	LP-700X	LP-800X	LP-900X
薄膜宽度 (Film width)	Max.450mm	Max.600mm	Max.700mm	Max.800mm	Max.900mm
制袋长度 (Bag length)	150-450mm	160-500mm	180-600 mm	210-650mm	240-700mm
制袋宽度 (Bag width)	50-180mm	100-280mm	100-330 mm	120-350mm	150-400mm
产品高度 (Product height)	Max.80mm	Max.110mm	Max.110mm	Max.130mm	Max.150mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm
包装速度 (Packaging rate)	40-150 bags/min	20-150 bags/min	20-130 bags/min	20-120 bags/min	20-100 bags/min
电源规格 (Power)	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,4.5kw	220V,50/60Hz,4.5kw
机器尺寸 (Machine size)	(L)4150*(W)820*(H)1450mm	(L)4300*(W)920*(H)1460mm	(L)4380*(W)980*(L)1480mm	(L)4100*(W)1170*(H)1550mm	(L)4300*(W)1270*(H)1550mm
机器质量 (Machine quality)	About650kg	About 680kg	About 720kg	About 800kg	About 850kg
备 注 (Remarks)	可加充气装置 (optional air filling device) / 插角装置 (optional angle folding)				
包装材质 (Film material)	OPP、PE、PVC、OPP/PP、PT/PE、KOP/PP镀铝膜、铝膜				


(四) 包装样品展示 Packaging samples show



LP 系列枕式机往复式包装机

Reciprocating flow packing machine

LP-450W/LP-600W

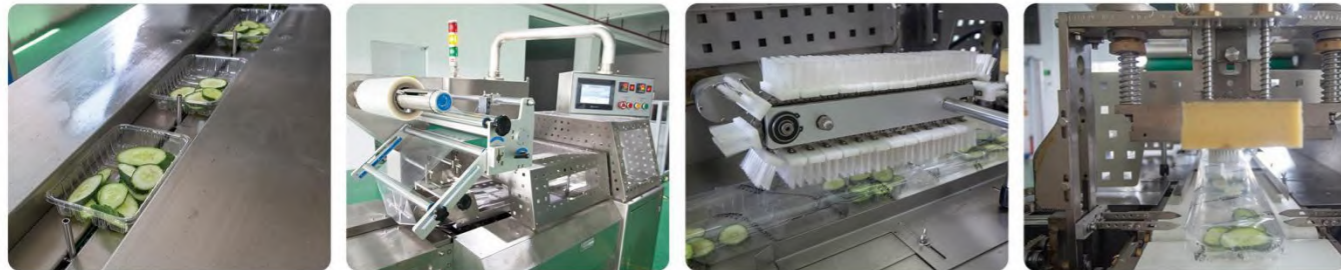

(一) 应用范围

- 适合于蔬菜瓜果、饼干、米通、雪饼、面包、方便面、米粉、纸巾、卫生巾、工业零件、纸盒或托盘等有规则物体带插角的大包装。

(二) 主要性能和结构特点

- 三伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
- 人机界面，参数设定方便快捷。
- 故障自诊功能，故障显示一目了然。
- 高敏感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
- 温度独立PID控制，更适合各种包装材质。
- 定位停机功能，不粘刀，不浪费包装膜。
- 传动系统简洁，工作更可靠，维护保养更方便。
- 所有控制由软件实现，方便功能调整和技术升级，永不落后。

Applications

- Suitable for packaging regular objects such as biscuits, pies, bread, instant noodles, drugs, daily appliances, industrial parts, paper boxes, plates, etc.

Features

- Three servo motor control, Bag length can be set and cut in one step, saving time and film.
- Interface features easy and quick setting and operation.
- Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software, easy for function adjusting and technical upgrade.

包装机参数

枕式机选配置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag

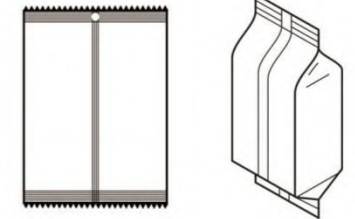

(三) 技术规格 Specifications

机 型 (Type)	LP-450W	LP-600W
薄膜宽度 (Film width)	Max.450mm	Max.600mm
制袋长度 (Bag length)	120-450mm	120-450mm
制袋宽度 (Bag width)	50-160mm	50-200mm
产品高度 (Product height)	10-80mm	10-80mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm
包装速度 (Packaging rate)	20-80 bags/min	20-80 bags/min
电源规格 (Power)	220V,50/60Hz,3.2kw	220V,50/60Hz,3.6kw
机器尺寸 (Machine size)	(L)4380*(W)870*(H)1500mm	(L)3990*(W)970*(H)1500mm
机器质量 (Machine quality)	About950kg	About 1160kg
备 注 (Remarks)	往复式封切系统，有插角装置 (Reciprocation end sealing system, with angle folding device)	
包装材质 (Film material)	OPP、PE、PVC、OPP/CPP、PT/PE、KOP/CPP 镀铝膜、铝膜	

(四) 包装样品展示 Packaging samples show



LP 系列枕式面包包装机

Bread flow packing machine

LP-680B/LP-800B



(一) 应用范围

- 适合于面包, 方便面, 月饼, 蔬菜瓜果, 药品, 日用品, 工业零件, 纸盒或托盘等各类有规则物体的包装。

(二) 主要性能和结构特点

- 三伺服控制, 袋长即设即切, 无需调节空走, 一步到位, 省时省膜。
- 可与贴标机连接, 实现全自动贴标包装。
- 人机界面, 参数设定方便快捷。
- 故障自诊功能, 故障显示一目了然。
- 高敏感度光电眼色标跟踪, 数字化输入封切位置, 使封切位置更加准确。
- 温度独立PID控制, 更适合各种包装材质。
- 定位停机功能, 不粘刀, 不浪费包装膜。
- 传动系统简洁, 工作更可靠, 维护保养更方便。
- 所有控制由软件实现, 方便功能调整和技术升级, 永不落后。

Applications

- Packaging various kinds of regular objects like biscuits,bread, instant ,noodles, moon-cakes,drugs, daily applications, industrial parts,paper boxes,tray. Etc.

Features

- Dual frequency conversion control, Bag length can be set and cut in one step,saving time and film.
- It can be connected with the labeling machine to realize full-automatic labeling and packaging.
- Interface features easy and quick setting and operation.
- Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software,easy for function adjusting and technical upgrade.

包装机参数

枕式机选配置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag



(三) 技术规格 Specifications


机 型 (Type)	LP-680B	LP-800B
薄膜宽度 (Film width)	Max.680mm	Max.780mm
制袋长度 (Bag length)	150-560mm	210-650mm
制袋宽度 (Bag width)	100-260mm	120-350mm
产品高度 (Product height)	Max.110mm	Max.130mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm
包装速度 (Packaging rate)	30-150 bags/min	30-150 bags/min
电源规格 (Power)	220V,50/60Hz,6kw	220V,50/60Hz,6kw
机器尺寸 (Machine size)	(L)4800*(W)1200*(H)1700mm	(L)4800*(W)1200*(H)1700mm
机器质量 (Machine quality)	About 1120kg	About 1150kg
包装材质 (Film material)	OPP、PE、PVC、OPP/CPP、PT/PE、KOP/CPP 镀铝膜、铝膜	

(四) 包装样品展示 Packaging samples show



LP 系列枕式高速糖果包装机

Candy flow packing machine

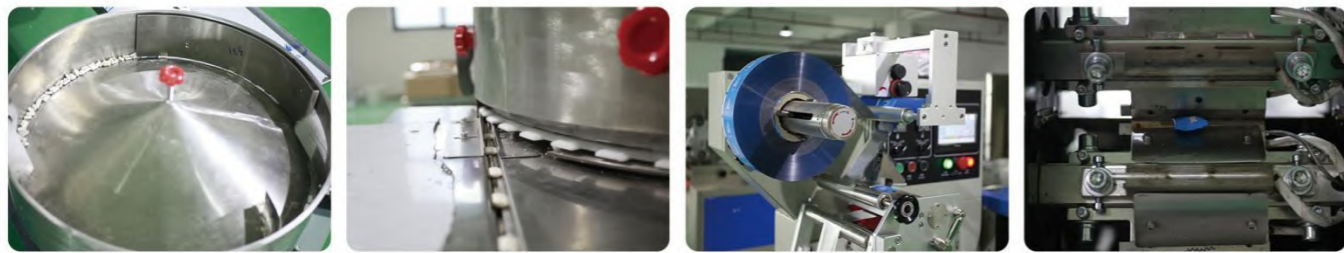

(一) 应用范围

- 糖果、口香糖、巧克力等方形，球形，圆片，圆柱形，扭结形、椭圆形及各种异形糖果及固体物块的包装。

(二) 主要性能和结构特点

- 单伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
- 高速对标封切糖果，封切位置精准。
- 人机界面，参数设定方便快捷。
- 故障自诊功能，故障显示一目了然。
- 高敏感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
- 温度独立PID控制，更好适合各种包装材质。
- 定位停机功能，不粘刀，不浪费包装膜。
- 传动系统简洁，工作更可靠，维护保养更方便。
- 所有控制由软件实现，方便功能调整和技术升级，永不落后。

Applications

- Packaging various kinds of regular objects like Candy, chocolate, chewing gum and suit for square, spherical, disc, cylindrical, kinked, oval and all kinds of special-shaped candies and solid blocks.

Features

- Servo motor control, Bag length can be set and cut in one step, saving time and film.
- Interface features easy and quick setting and operation.
- Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software, easy for function adjusting and technical upgrade.

包装机参数

枕式机选配置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag



(三) 技术规格 Specifications

机 型 (Type)	LP-250C
薄膜宽度 (Film width)	50-120mm
制袋长度 (Bag length)	10-50mm
制袋宽度 (Bag width)	10-30mm
产品高度 (Product height)	4-25mm
卷膜直径 (Film roll diameter)	Max.320mm
包装速度 (Packaging rate)	50-900 bags/min
电源规格 (Power)	220V,50/60Hz,3.2kw
机器尺寸 (Machine size)	(L)3850*(W)1100*(H)1800mm
机器质量 (Machine quality)	About 720kg
包装材质 (Film material)	OPP、PE、PVC、OPP/CPP、PT/PE、KOP/CPP 镀铝膜、铝膜

(四) 包装样品展示 Packaging samples show



LP 系列枕式后拉膜包装机

Back stretch flow packing machine

LP-250/LP-350/LP-450/LP-600/LP-700/LP-800/LP-900



(一) 应用范围

- 毛巾, 纸巾, 挂面, 蛋卷, 香肠, 冰棒, 软糖, 饼干, 鲜果等柔软状, 长条状, 散装物的包装。

(二) 主要性能和结构特点

- 三伺服控制, 袋长即设即切, 无需调节空走, 一步到位, 省时省膜。
- 人机界面, 参数设定方便快捷
- 故障自诊功能, 故障显示一目了然
- 高敏感度光电眼色标跟踪, 数字化输入封切位置, 使封切位置更加准确
- 温度独立PID控制, 更好适合各种包装材质。
- 定位停机功能, 不粘刀, 不浪费包装膜
- 传动系统简洁, 工作更可靠, 维护保养更方便
- 所有控制由软件实现, 方便功能调整和技术升级, 永不落后。

Applications

- Towels, paper towels, dried noodles, egg rolls, sausages, popsicles, gummies, biscuits, fresh fruits and other soft, long strips, bulk packaging.

Features

- Three servo motor control, Bag length can be set and cut in one step, saving time and film.
- Interface features easy and quick setting and operation. Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software, easy for function adjusting and technical upgrade.

包装机参数

枕式机选配置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag

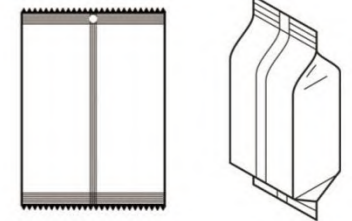

(三) 技术规格 Specifications

机 型 (Type)	LP-250	LP-350	LP-450	LP-600	LP-700	LP-800	LP-900
薄膜宽度 (Film width)	Max.250mm	Max.350mm	Max.450mm	Max.600mm	Max.700mm	Max.800mm	Max.900mm
制袋长度 (Bag length)	65-190mm or 120-280mm	90-220mm or 150-330mm	150-450mm	160-500mm	180-600 mm	210-650mm	240-700mm
制袋宽度 (Bag width)	30-110mm	50-160mm	50-180mm	100-280mm	100-330 mm	120-350mm	150-400mm
产品高度 (Product height)	Max.45mm	Max.65mm	Max.80mm	Max.110mm	Max.110mm	Max.130mm	Max.150mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm
包装速度 (Packaging rate)	40-230 bags/min	40-230 bags/min	40-150 bags/min	20-150 bags/min	20-130 bags/min	20-120 bags/min	20-100 bags/min
电源规格 (Power)	220V,50/60Hz,2.6kw	220V,50/60Hz,2.6kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,2.8kw	220V,50/60Hz,4.5kw	220V,50/60Hz,4.5kw
机器尺寸 (Machine size)	(L)3920*(W)670*(H)1320mm	(L)3920*(W)670*(H)1320mm	(L)4150*(W)820*(H)1450mm	(L)4300*(W)920*(H)1460mm	(L)4380*(W)980*(H)1480mm	(L)4100*(W)1170*(H)1550mm	(L)4300*(W)1270*(H)1550mm
机器质量 (Machine quality)	About 500kg	About 550kg	About 650kg	About 680kg	About 720kg	About 800kg	About 850kg
备 注 (Remarks)	可加充气装置 (optional air filling device) / 插角装置 (optional angle folding)						
包装材质 (Film material)	OPP、PE、PVC、OPP/PP、PT/PE、KOP/PP镀铝膜、铝膜						


(四) 包装样品展示 Packaging samples show



LP 系列枕式机抽真空口罩包装机

Mask flow packing machine

LP-350B/LP-450B

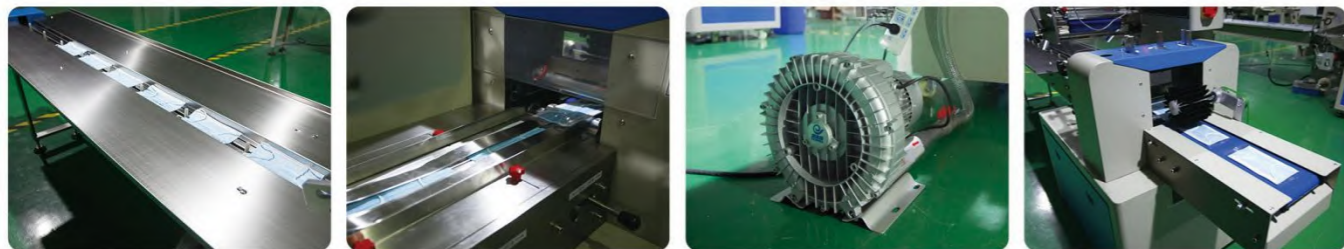

(一) 应用范围

- 适用于KN95 口罩、一次性平面口罩、面膜、湿纸巾、餐巾等需要真空抽气包装的日用品。

(二) 主要性能和结构特点

- 三伺服控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
- 高速对标封切口罩，封切位置精准。
- 可调节真空泵抽气功能，实现无气包装，节省口罩装入纸箱的空间。
- 可直接对接口罩生产线，加装口罩计数功能，实现一站式生产包装
- 人机界面，参数设定方便快捷。
- 故障自诊功能，故障显示一目了然。
- 高敏感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确。
- 温度独立PID 控制，更好适合各种包装材质。
- 定位停机功能，不粘刀，不浪费包装膜。
- 传动系统简洁，工作更可靠，维护保养更方便。
- 所有控制由软件实现，方便功能调整和技术升级，永不落后。

Applications

- Suits for KN95 masks, disposable flat masks, facial masks, wet tissues, napkins and other daily products that require bag packing without the air.

Features

- Three servo motors control, Bag length can be set and cut in one step, saving time and film.
- Interface features easy and quick setting and operation.
- Adjustable vacuum pump to draw the air from the bag, save the space into carton boxes.
- Directly connect to the masks production line to reach the producing and packing together.
- Self failure diagnosis, clear failure display.
- High sensitivity photoelectric eye color tracing, numerical input of cutting sealing position for extra accuracy.
- Temperature independent PID control, more suitable for packaging different materials.
- Positioned stop function, without sticking knife or wasting film.
- Simple driving system, reliable working, convenient maintenance.
- All control is realized through software, easy for function adjusting and technical upgrade.

包装机参数

枕式机选配装置:


1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 插角机构
7. 打码机
8. 贴标机
9. 热转印打码机
10. 充气装置
11. 切料停机
12. 防空包

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Angle folding device
7. Date printer
8. Labeling machine
9. Thermal transfer code printer
10. Air charging system
11. Cutting stop
12. Prevent empty package

封口形式 Type of bag



(三) 技术规格 Specifications

机 型 (Type)	LP-350B	LP-450B
薄膜宽度 (Film width)	Max.350mm	Max.450mm
制袋长度 (Bag length)	150-330mm	210-650mm
制袋宽度 (Bag width)	50-160mm	50-180mm
产品高度 (Product height)	Max.60mm	Max.75mm
卷膜直径 (Film roll diameter)	Max.320mm	Max.320mm
包装速度 (Packaging rate)	80-150 bags/min	80-150 bags/min
电源规格 (Power)	220V,50/60Hz,2.6kw	220V,50/60Hz,2.8kw
机器尺寸 (Machine size)	(L)4030x(W)770x(H)1420mm	(L)4030x(W)820x(H)1420mm
机器质量 (Machine quality)	About 580kg	About 650kg
包装材质 (Film material)	OPP、PE、PVC、OPP/CPP、PT/PE、KOP/CPP 镀铝膜、铝膜	


(四) 包装样品展示 Packaging samples show



LP 系列四边封包装机

Four side sealing packaging machine

LPF-400

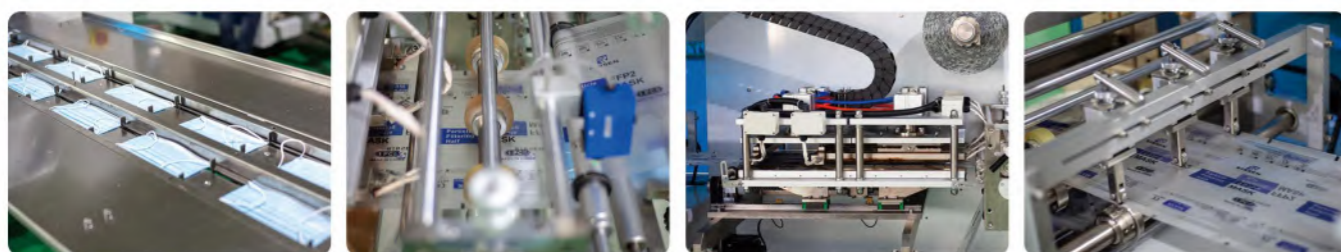

(一) 应用范围

- 适用于口罩，酒店用品，卡片，膏药贴等日化包装。

(二) 主要性能和结构特点

- 彩色触摸屏操作界面，操作简单；采用科学的四轴伺服驱动系统；PLC可编程控制器智能控制整机运行，具有送膜精准、物料输送稳定、切袋精准等优点。
- 创新设计：独立导柱模座，移动式同步热封系统，封口温度更均匀稳定，封边严密，经久耐用！不同厚度、不同材质的包装材料适应性更强。
- 医疗袋型：四边封，末端易撕开；纸+透明薄膜袋。
- 多功能性：本机也适用于一种包装材料的包装袋。该机可根据产品长度的变化自动封袋。

Applications

- Suitable to pack masks, hotel supplies, cards, plasters and so on.

Features

- The color touch screen operation interface is simple to operate; the scientific 4-axis servo drive system is adopted; the PLC programmable controller intelligently controls the operation of the whole machine, which has the advantages of precise film feeding, stable material transfer, and precise bag cutting.
- Innovative design: independent guide pillar mold base, mobile synchronous heat sealing system, the temperature of the sealing surface is more uniform and stable, the sealing edge is tight, and it is durable!. Packaging materials of different thicknesses and materials are more adaptable.
- Medical bag type: Four-side sealing bag, easy to tear opening at the end; paper + transparent film bag.
- Versatility: This machine is also suitable for use in packaging bags of one type of packaging material. The machine can seal bag base on the products length changing automatically.

包装机参数

四边封选配装置:

- 1.打挂孔
- 2.打码机
- 3.一卷膜分切结构
- 4.两卷膜封合结构
- 5.V型易撕口
- 6.冲圆角
- 7.单通道，双通道，三通道可选

Parameter

Optional Accessories:

- 1.Hanging hole puncher
- 2.Date printer
- 3.One roll of film slitting structure
- 4.Two rolls of film sealing structure
- 5.V shape easy tear
- 6.Round angle
- 7.Single-lane, Two-lane, Three-lane feeding as choices

(三) 技术规格 Specifications

机型 (Type)	LPF-400
薄膜宽度 (Film width)	Max.380mm
制袋长度 (Bag length)	Max.380mm
制袋宽度 (Bag width)	Max.190mm
产品包装厚度 (Product packaging thickness)	1-10mm
机器噪音 (Machine noise)	< 80db(A)
卷膜直径 (Max diameter of roll film)	Max.360mm
包装材质 (Packing material)	ET+OPP, BOPP, CPP, PET+AL, 单层或双层加热复合膜/and other one layer or double layer heated complex film
包装速度 (Packing speed)	80-100 bags/min
机器尺寸 (Machine size)	(L)5000*(W)1200*(H)1520mm
机器毛重 (Machine Gross Weight)	About 1600kg
电压 (Power voltage)	AC220V 50HZ
传动功率 (Transmission Power)	4.2kw
加热功率 (Heating Power)	3.2kw
气压 (Air Pressure)	0.5-0.7Mpa
应用 (Application)	口罩，酒店用品，卡片，膏药贴等日化包装/masks, hotel supplies, cards, plasters and so on

(四) 包装样品展示 Packaging samples show



LP 系列热收缩膜包装机

Shrink wrapper machine

LPF-590



(一) 应用范围

- 广泛用于日用品、洗发水、口香糖盒、书本、一次性餐具、纸盒等包装。

(二) 主要性能和结构特点

- 产品预设数可记忆保持100种产品规格，生产时输入产品号即可以最快捷地进入生产状态节约调试工作量。
- 自动控温，PLC控制，三伺服控制，可快速更换包装物，高高度电眼自动追踪，设定后无需手动调整，封切尺寸和位置准确，封口牢固美观。
- 封切刀经特种合金材料喷涂铁氟龙处理，不粘膜。
- 滚筒外包耐高温硅胶管可自由转动，不锈钢加热管，内部三层隔热，大功率循环风机，双向热循环风使热量均匀，恒温。

Applications

- Widely used in packaging of daily necessities, shampoos, gum boxes, books, disposable tableware, Carton boxes, etc.

Features

- The preset number of products can be memorized to maintain 100 product specifications. Enter the product number during production to enter the production state most quickly and save debugging workload.
- Automatic temperature control, PLC control, three-servo control, can quickly change the packaging, high-altitude electric eye automatic tracking, no need to manually adjust after setting, the sealing and cutting size and position are accurate, and the sealing is firm and beautiful.
- The sealing and cutting knife is treated with special alloy material sprayed with Teflon, and it does not stick to the film.
- The drum outside the high temperature resistant silicone tube can rotate freely, stainless steel heating tube, internal three-layer heat insulation, high-power circulating fan, two-way hot circulating air to make the heat even and constant temperature.

包装机参数

四边封选配装置:

1. 皮带送料机构
2. 端封拖链机构
3. 辅助送料机构
4. 防切料装置
5. 打孔装置
6. 打码机
7. 贴标机
8. 热转印打码机
9. 切料停机

Parameter

Optional Accessories:

1. Belt material conveyor
2. End sealing drag chain
3. Auxiliary material feeding device
4. Material cut prevent device
5. Perforating device
6. Date printer
7. Labeling machine
8. Thermal transfer code printer
9. Cutting stop

(三) 技术规格 Specifications

机型 (Type)	LP-590 (Flow packing machine)
包装速度 (Packing speed)	5-120 5-120 pcs/minute
包装尺寸 (Product dimension)	L:60-280 / W:60-200 H:30-100
电压 (Power voltage)	220/380V/50HZ
总功率 (Total Power)	约5.5KW
机器尺寸 (Machine size)	(L)2700*(W)1000*(H)1680mm
机器毛重 (Machine Gross Weight)	800KG
机型 (Type)	LP-240 (Shrink wrapper)
电源 (Voltage)	380V/50HZ-60HZ
总功率 (Total Power)	约15KW
包装速度 (Packing speed)	220/380V/50HZ
机器尺寸 (Machine size)	(L)2400*(W)710*(H)1400mm
机器毛重 (Machine Gross Weight)	400kg
包装材质 (Film material)	POF PE PVC PP

(四) 包装样品展示 Packaging samples show

