



佛山市揽德包装机械有限公司
FOSHAN LAND PACKAGING MACHINERY CO.,LTD

📍 地址：佛山市南海区罗村新光源产业基地C7栋
Add : Building C7 of New Lighting Source Industrial Base.
Luocun,Nanhai District,Foshan City,GD,China

☎ Tel : 0757-81807872 Fax : 0757-81807758

✉ E-mail : yang@landpacking.com

🌐 Web : www.landpack.cn / www.landpack.com

LANDPACK

佛山市揽德包装机械有限公司
FOSHAN LAND PACKAGING MACHINERY CO.,LTD

公司简介

Company profile

揽德包装机械有限公司坐落于广东省佛山市，以其优越的地理位置和良好的市场口碑，赢得广大客户的支持。公司销售网络辐射全国各地，远销全球30多个国家和地区。

本公司是研发、制造和销售各种液体灌装机、颗粒灌装机、粉末灌装机、封口机、封尾机和贴标机等相关设备,并提供全自动包装生产线整线设计和整体解决方案的现代化包装设备企业。

公司通过ISO9001质量管理体系认证,相关设备通过CE、SGS等认证。配备有丰富经验的研发、制造工程师队伍和专业的销售服务团队,确保您用合理的成本,获得性能稳定,外观卓越和人性化程度高的设备和优质满意的服务体验。

设备广泛适用于食品、中药材、饮料和农产品等相关行业的产品包装和各种制罐厂的生产中。

揽德包装机作为国内先进包装设备制造厂商，致力于为企业 提供包装整体解决方案，令企业所需包装的过程得到质的提升，最大限度地解放了劳动力，避免了二次污染，以高效的方式提高企业的生产率。

LANDPACKAGING MACHINERY CO., LTD. IS LOCATED IN FOSHAN CITY, GUANGDONG PROVINCE. WITH ITS SUPERIOR GEOGRAPHICAL LOCATION AND GOOD MARKET REPUTATION, IT HAS WON THE SUPPORT OF CUSTOMERS. THE COMPANY'S SALES NETWORK RADIATES ALL OVER THE COUNTRY AND IS EXPORTED TO MORE THAN 30 COUNTRIES AND REGIONS AROUND THE WORLD.

THE COMPANY IS A MODERN PACKAGING EQUIPMENT ENTERPRISE WHICH DEVELOPS, MANUFACTURES AND SELLS ALL KINDS OF LIQUID FILLING MACHINES, PARTICLE FILLING MACHINES, POWDER FILLING MACHINES, SEALING MACHINES, TAIL SEALING MACHINES AND LABELING MACHINES, AND PROVIDES FULL-AUTOMATIC PACKAGING PRODUCTION LINE DESIGN AND OVERALL SOLUTIONS.

THE COMPANY HAS PASSED ISO 9001 QUALITY MANAGEMENT SYSTEM CERTIFICATION, AND RELEVANT EQUIPMENT HAS PASSED CE AND SGS CERTIFICATION. EQUIPPED WITH A TEAM OF EXPERIENCED R & D AND MANUFACTURING ENGINEERS AND A PROFESSIONAL SALES AND SERVICE TEAM, YOU CAN GET STABLE PERFORMANCE, EXCELLENT APPEARANCE AND HIGH DEGREE OF HUMANIZATION EQUIPMENT AND HIGH QUALITY AND SATISFACTORY SERVICE EXPERIENCE AT REASONABLE COST.

THE EQUIPMENT IS WIDELY USED IN FOOD, CHINESE HERBAL MEDICINE, BEVERAGE, AGRICULTURAL PRODUCTS AND OTHER RELATED INDUSTRIES OF PRODUCT PACKAGING AND VARIOUS CANNERY PRODUCTION.



CE 认证



ISO 认证



SGS 认证



TUV 认证



专利证书

全自动圆瓶贴标机

Round Bottle Labeling Machine



产品介绍/Description

本产品可用于医药、化妆品、日化，食品等行业的圆形物体圆周贴标，适用范围广泛。该机型采用滚轮搓标装置，贴标更加精准。机器结构简单易操作且易于维护。通用型的分瓶装置，任何直径的瓶形都不用更换配件，可快速调整校准。

This product can be used for circle labeling of round objects in the medicine, cosmetics, daily chemical, food and other industries, and has a wide range of applications. This model adopts a roller rubbing device to make labeling more accurate. The machine structure is simple, easy to operate and easy to maintain. General-purpose bottle separating device, no need to change parts for any diameter bottle shape, which can be adjusted and calibrated quickly.

适用范围/Application



产品特点/Features

- 整体外观材质主要采用304不锈钢和铝合金材质；
- 贴标质量优，采用软质胶轮覆标，贴标平整、无褶皱；
- 智能控制，自动光电跟踪，具有无物不贴标功能；
- 采用智能程序设计触摸屏控制，使用和设置方便简单；
- 自动光电追踪，具备无物不贴标，防止漏贴和浪费标签。
- 可根据客户需求定制，贴标头可选取世界知名工厂高精度伺服马达控制出标，实现真正闭环控制，高精度细分，出标速度稳定；
- The overall appearance material is mainly made of 304 stainless steel and aluminum alloy;
- The labeling quality is excellent, and the label is covered with a soft rubber wheel, and the labeling is flat and without wrinkles;
- Intelligent control, automatic photoelectric tracking, with the function of nothing but labeling;
- Adopting intelligent programming and touch screen control, convenient and simple to use and set;
- Automatic photoelectric tracking, with no objects and no labeling, to prevent missing and wasting labels.
- It can be customized according to customer needs. The labeling head can be controlled by high-precision servo motors from world-renowned factories to achieve true closed-loop control, high-precision subdivision, and stable labeling speed;

技术参数/Technical parameters

型号/Model	LFT-YP-00
贴标速度/Labeling Speed	20-60瓶/分钟;20-60 bottles/minute
贴标精度/Labeling Accuracy	±1mm(不包含产品和标签错误/Does not contain product and label errors)
标签最大宽度/Max Label Width	100mm(可按需求增加宽度/Can be customized)
被贴物尺寸/Applicable Product Size	直径Φ30mm~Φ80mm(可按需求定做/Can be customized)
适用纸卷内径/Applicable inner diameter of paper	直径Φ76mm
适用纸卷外径/Applicable outer diameter of paper	最大直径Φ330mm/Max.Φ330mm
使用气源/Air Source	4-6 KG 30L/min
整机尺寸/Dimension	2000*800*1600mm
适用电压/Voltage	220V 50 Hz 2000W
整机重量/Weight	250KG

高速圆瓶贴标机

High Speed Round Bottle Labeling Machine



产品介绍/ Description

该机型适用于医药、日化、食品、化妆品等行业的圆形物体圆周贴标。整体外观材质主要采用304不锈钢和铝合金材质。智能控制下贴标速度快，可实现无物不贴标。

This model is suitable for circle labeling of round objects in the medicine, daily chemical, food, cosmetics and other industries. The overall appearance material is mainly made of 304 stainless steel and aluminum alloy. The labeling speed is fast under intelligent control, and it can realize that there is nothing without labeling.

适用范围/ Application



产品特点/ Features

- 该机型的特点是采用滚轮搓标，速度快；
- 机器结构简单，紧凑，便于操作及维护；
- 适用任何直径的瓶形，无需更换配件，可快速调试校准。
- 智能控制，自动光电跟踪，具有无物不贴标功能；
- 贴标头可选用世界知名工厂高精度伺服马达控制出标，实现真正闭环控制，高精度细分，最大出标速度为每分钟60米；
- The feature of this model is the use of rollers to rub the label, and the speed is fast;
- The machine structure is simple, compact, easy to operate and maintain;
- Suitable for any diameter bottle shape, no need to change accessories, quick adjustment and calibration;
- Intelligent control, automatic photoelectric tracking, no bottles no labeling;
- The labeling head can be controlled by high-precision servo motors from world-renowned factories to achieve true closed-loop control, high-precision subdivision, and the maximum labeling speed is 60 meters per minute;

技术参数/ Technical parameters

型号/ Model	LFT-GS-00
贴标速度/ Labeling Speed	最大可达120件/分;Max 120 pieces/ min
贴标精度/ Labeling Accuracy	±1mm(不包含产品和标签错误/Does not contain product and label errors)
标签最大宽度/ Max Label Width	100mm
被贴物尺寸/ Applicable Product Size	直径Φ30-80mm
适用纸卷内径/ Applicable inner diameter of paper	直径Φ76mm
适用纸卷外径/ Applicable outer diameter of paper	最大直径Φ350mm;Max.Φ350mm
使用气源/ Air Source	4-6 KG 30L/min
整机尺寸/ Dimension	2000*800*1650mm
适用电压/ Voltage	220V 50Hz 1000W
整机重量/ Weight	300 KG

搓滚式贴标机

Roll Labeling Machine



产品介绍/ Description

本机器适用于医药、日化等行业的圆形物体圆周贴标。采用滚轮搓标装置，不同于皮带式搓标装置。由于皮带在运动过程中会出现跑偏现象，影响贴标效果。采用这种贴标方式可以彻底消除皮带上下串动引起的贴标误差。

This machine is suitable for circular labeling of circular objects in the pharmaceutical, daily chemical and other industries. The roller rubbing label device is different from the belt rubbing label device. Because the belt will deviate during the movement, it will affect the labeling effect. Using this labeling method can completely eliminate the labeling error caused by the up and down movement of the belt.

适用范围/ Application



产品特点/ Features


- 采用滚轮方式搓标，贴标精度更高，速度更快；
- 机器结构简单，利于操作和后期维护；
- 具有光电控制，可实现无物不贴标，避免浪费标签成本；
- 具有先进的人性化界面，以及在线帮助系统；
- Adopt the roller method to rub the label, higher labeling accuracy faster;
- The machine structure is simple, conducive to operation and maintenance;
- With photoelectric control, no bottles no labeling and avoid wasting label;
- It has an advanced human interface and an online help system;

技术参数/ Technical parameters

型号/ Model	LFT-CG-00
贴标速度/ Labeling Speed	20-60瓶/分钟;20-60 bottles/ minute
贴标精度/ Labeling Accuracy	±1mm(不包含产品和标签错误/Does not contain product and label errors)
标签最大宽度/ Max Label Width	100mm(可按需求增加宽度/ Can be customized)
被贴物尺寸/ Applicable Product Size	直径Φ30mm~Φ80mm(可按需求定做/ Can be customized)
适用纸卷内径/ Applicable inner diameter of paper	直径Φ76mm
适用纸卷外径/ Applicable outer diameter of paper	最大直径Φ330mm;Max.Φ330mm
使用气源/ Air Source	4-6 KG 30L/min
整机尺寸/ Dimension	2000*800*1600mm
适用电压/ Voltage	220V 50 Hz 2000W
整机重量/ Weight	250KG

平面贴标机

Flat Surface Labeling Machine

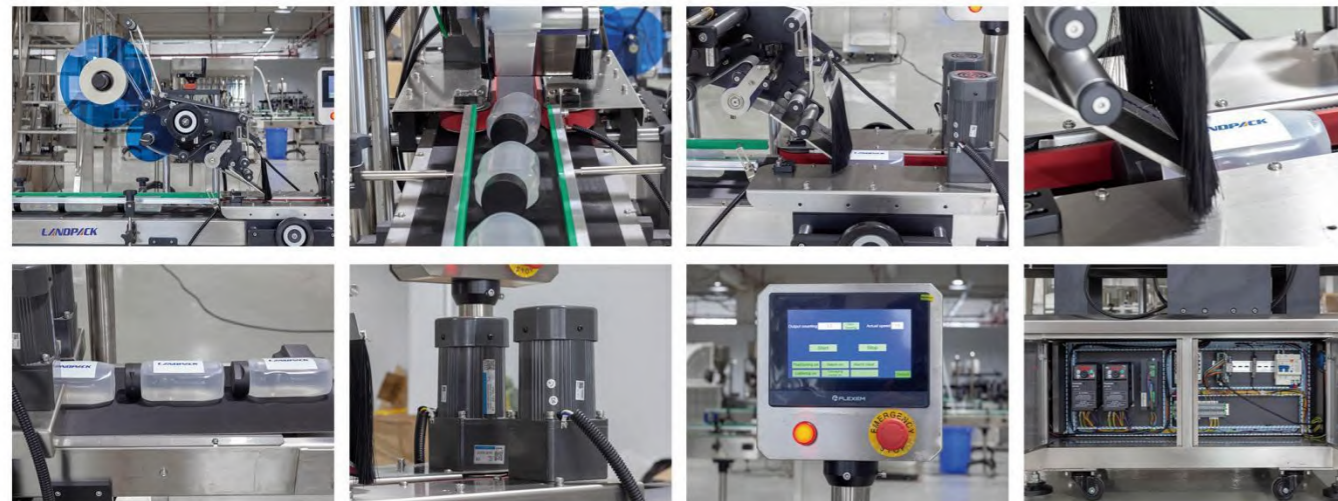

产品介绍/Description

平面贴标机适用于食品、日化、医药以及其他轻工行业中的各种扁形、方形类产品。针对扁形、方形等表面不规则及有弧度瓶身而设计以确保贴标精度及效果。双侧链条带校正装置可以确定扁瓶、方瓶的对中性和瓶身的稳定性。

The flat labeling machine is suitable for various flat and square products in the food, daily chemical, pharmaceutical and other light industry industries. It is designed for flat, square and other surface irregularities and curved bottles to ensure labeling accuracy and effect. The double-sided chain strap correction device can determine the exact position of the flat bottle and the square bottle and the stability of the bottles.

适用范围/Application



产品特点/Features


- 人性化触控屏，操作简单直观，功能齐全，具有丰富的在线帮助功能；
- 该机器采用日本三菱PLC，配备名厂触摸屏，可实现多语种操作界面；
- 二段式离合设计，使标签粘贴更稳定，利于提高贴标精度；
- 皮带式输送线，适用产品范围广泛。可选配产品夹带机构或贴标模具，实现更高精度的贴标；
- 可选配全封闭式机架，SCHMEASAL安全开关，分页器，可准确快速地应用于单张纸、信封、贺卡、纸盒等产品的分页；
- Humanized touch screen, simple and intuitive operation, complete functions, and rich online help functions!
- The machine adopts Japanese Mitsubishi PLC and is equipped with a famous factory touch screen, which can realize a multilingual operation interface!
- The dual-stage clutch design makes the label sticking more stable and helps to improve the labeling accuracy!
- Belt conveyor line, applicable to a wide range of products. Optional product entrainment mechanism or labeling mold to achieve higher precision labeling!
- It can be equipped with a fully enclosed rack, SCHMEASAL safety switch, and a paging device, which can be accurately and quickly applied to the paging of single sheets, envelopes, greeting cards, paper boxes and other products;

技术参数/Technical parameters

型号/Model	LFT-PM-00
贴标速度/Labeling Speed	10-40米/分钟;10-40 meters/min
贴标精度/Labeling Accuracy	±1mm(不包含产品和标签错误/Does not contain product and label errors)
标签最大宽度/Max Label Width	100mm(可按需求增加宽度/Can be customized)
被贴物尺寸/Applicable Product Size	直径Φ30-80 mm(可按需求定制/Can be customized)
适用纸卷内径/Applicable inner diameter of paper	直径Φ76 mm
适用纸卷外径/Applicable outer diameter of paper	最大直径Φ300 mm;Max.Φ300 mm
使用气源/Air Source	4-6 KG 30L/min
整机尺寸/Dimension	2000*800*1500mm
适用电压/Voltage	220V 50Hz 2000W
整机重量/Weight	250 KG

双面贴标机

Double Sides Labeling Machine

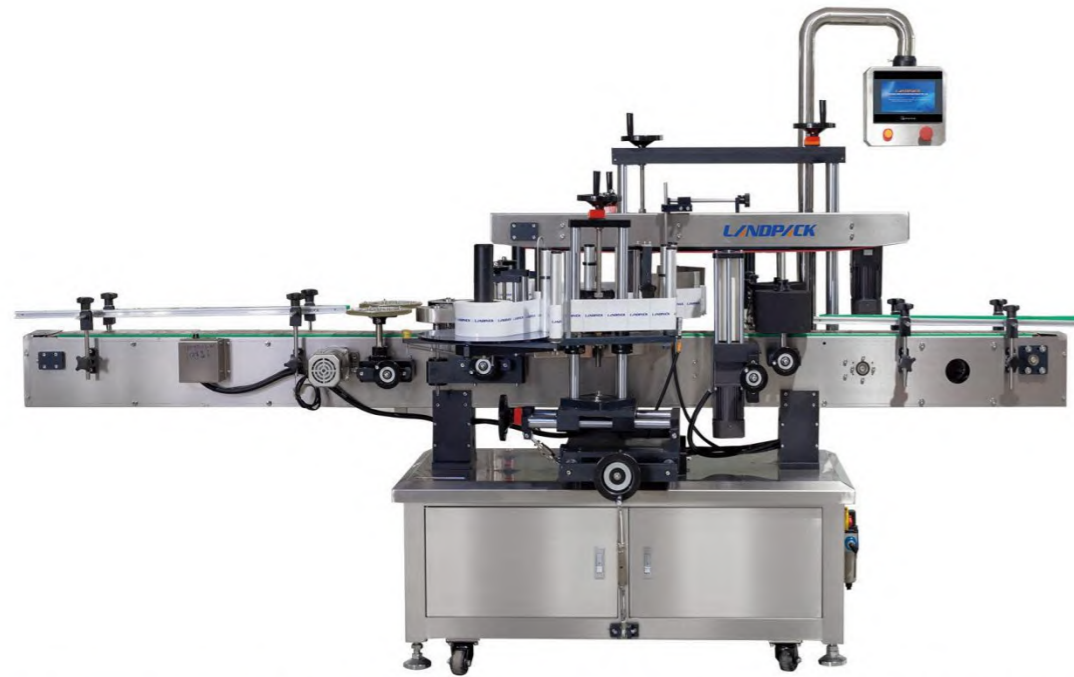

产品介绍/Description

适用于在各种方盒或扁平物表面进行贴标签或防伪标签。主机部分的设计吸收进口机的贴标传送方式，解决了一般国产贴标不稳定的因素，电眼检测，同步器追踪，确保出标速度与输送速度精确同步，同时速度随意可调，调校方便、操作简单。是生产食品、制药、化工、化妆品等企业需要的理想设备。

本机选用中英文人机对话触摸屏，50组资料记忆存储功能，变更产品和标签只需要通过触摸屏调整，就可以改变贴标位置和贴标长度，无须手工调节光纤电眼。

It is suitable for labeling or anti-counterfeiting labels on the surface of various square boxes or flat objects. The design of the host part absorbs the labeling transmission method of the imported machine, which solves the unstable factors of general domestic labeling. Electric eye detection and synchronizer tracking ensure accurate synchronization of the labeling speed and the conveying speed. At the same time, the speed can be adjusted at will, and the adjustment is convenient, easy to use. It is the ideal equipment for the production of food, pharmaceutical, chemical, cosmetics and other enterprises.

This machine uses Chinese and English man-machine dialogue touch screen, 50 sets of data memory storage function, changing products and labels only need to adjust through the touch screen, you can change the labeling position and labeling length, no need to manually adjust the fiber optic eye.

适用范围/Application



产品特点/Features


- 二段式离合设计，使标签粘贴更稳定，利于提高贴标精度；
- 该机器采用日本三菱PLC，配备各厂触摸屏，可实现多语种操作界面；
- 皮带式输送线，适用产品范围广泛。可选配产品夹带机构或贴标模具，实现更高精度的贴标；
- 可选配全封闭式机架，SCHMEASAL安全开关，分页器，可准确快速地应用于单张纸、信封、贺卡、纸盒等产品的分页；
- 贴标头可选用世界知名工厂高精度伺服马达控制出标，为高精度而设计，实现真正闭环控制；
- The dual-stage clutch design makes the label sticking more stable and helps to improve the labeling accuracy;
- The machine adopts Japanese Mitsubishi PLC and is equipped with a famous factory touch screen, which can realize a multilingual operation interface;
- Belt conveyor line, applicable to a wide range of products. Optional product entrainment mechanism or labeling mold to achieve higher precision labeling;
- Optional fully enclosed rack, SCHMEASAL safety switch, paging device, can be accurately and quickly applied to the paging of single sheets, envelopes, greeting cards, paper boxes and other products.
- The labeling head can be controlled by high-precision servo motors from world-renowned factories to control the labeling. It is designed for high precision and realizes true closed-loop control;

技术参数/Technical parameters

型号/Model	LFT-SM-00
贴标速度/Labeling Speed	10-40 瓶/分钟;10-40 bottles/min
贴标精度/Labeling Accuracy	±1mm(不包含产品和标签错误/Does not contain product and label errors)
标签最大宽度/Max Label Width	200mm
被贴物尺寸/Applicable Product Size	高度≤400mm 厚度≤100mm;H≤400mm T≤100mm (可根据尺寸定制/Can be customized)
适用纸卷内径/Applicable inner diameter of paper	直径Φ76.2 mm
适用纸卷外径/Applicable outer diameter of paper	最大直径Φ350mm;Max.Φ350mm
使用气源/Air Source	4-6KG 30L/min
整机尺寸/Dimension	3050*1450*1800mm
适用电压/Voltage	220V 50Hz 3500W
整机重量/Weight	500 KG

上下平面贴标机

Top And Bottom Flat Surface Labeling Machin

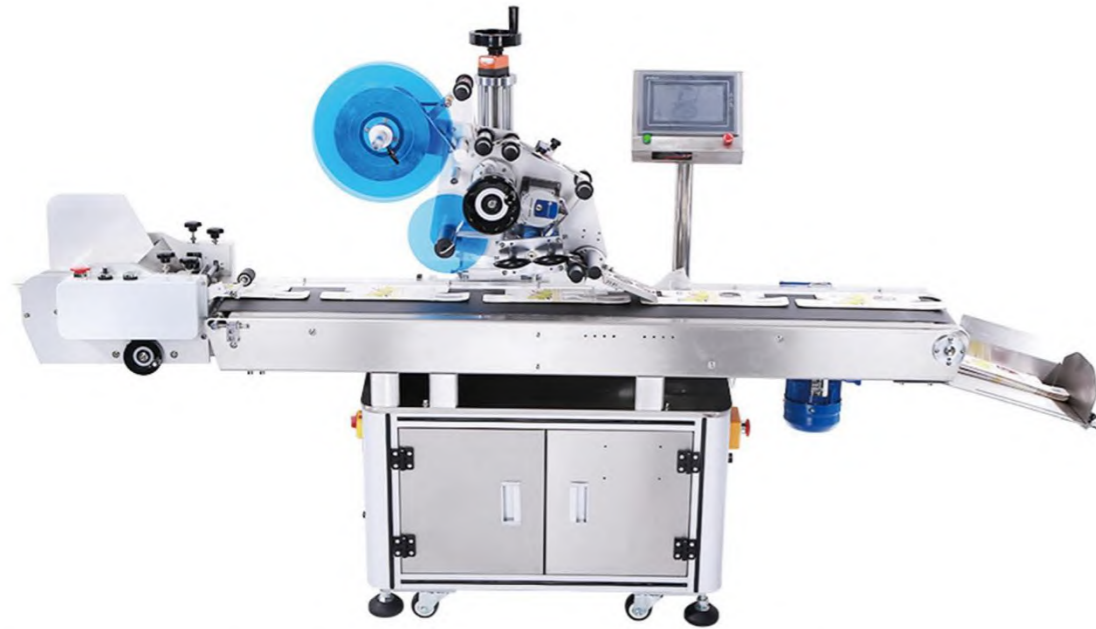

产品介绍/Description

适用于在各种方盒、方瓶、圆瓶或扁平物表面进行贴标签或防伪标签。主机部分的设计吸收进口机的贴标传送方式，解决了一般国产贴标不稳定的因素，电眼检测，同步器追踪，确保出标速度与输送速度精确同步，同时速度随意可调，调校方便、操作简单。是生产食品、制药、化工、化妆品等企业需要的理想设备。

本机选用中英文人机对话触摸屏，50组资料记忆存储功能，变更产品和标签只需要通过触摸屏调整，就可以改变贴标位置和贴标长度，无须手工调节光纤电眼。

It is suitable for labeling or anti-counterfeiting labels on the surface of various square boxes, square bottles, round bottles or flat objects. The design of the host part absorbs the labeling transmission method of the imported machine, which solves the unstable factors of general domestic labeling. Electric eye detection and synchronizer tracking ensure accurate synchronization of the labeling speed and the conveying speed. At the same time, the speed can be adjusted at will, and the adjustment is convenient, easy to use. It is an ideal equipment for the production of food, pharmaceuticals, chemicals, cosmetics and other companies.

This machine uses Chinese and English man-machine dialogue touch screen, 50 sets of data memory storage function, change the product and label only need to adjust through the touch screen, you can change the labeling position and labeling length, no need to manually adjust the fiber optic eye.

适用范围/Application



产品特点/Features


- 机器主要材料为不锈钢和高级铝合金，整体结构坚固，美观大方；
- 贴标平整、不起皱、无气泡、贴标精度高、稳定性好；
- 功能强大，可实现圆周面定位贴标（给定位置贴标）和圆周面无定位贴标；
- 结构紧凑，占地面积小，移动安装方便；
- 机械调整与标签缠绕结构组合的巧妙设计，使不同产品的调整与标签缠绕变得更简单、更省时；
- 完善的配套信息（包括结构、原理、操作、维护、升级等方向信息）可以充分保证机器的正常运行；
- The main material of the machine is stainless steel and high-grade aluminum alloy. The overall structure is firm and beautiful;
- Smooth labeling, no wrinkles, no bubbles, high labeling accuracy and good stability;
- With powerful functions, it can realize positioning labeling on the circumferential surface (labeling at a given position) and non-positioning labeling on the circumferential surface;
- Compact structure, small footprint, easy to move and install;
- The ingenious design of the combination of mechanical adjustment and label winding structure makes the adjustment and label winding of different products easier and more time-saving;
- Complete supporting information (including structure, principle, operation, maintenance, upgrade and other direction information) can fully guarantee the normal operation of the machine;

技术参数/Technical parameters

型号/Model	LFT-SX-00
贴标速度/Labeling Speed	30-150件/瓶;30-150 pieces/ bottles
贴标精度/Labeling Accuracy	±1mm(不包含产品和标签错误/Does not contain product and label errors)
标签最大宽度/Max Label Width	120mm(可按需求增加宽度/ Can be customized)
被贴物尺寸/ Applicable Product Size	宽度: 20-180mm 高度≤10mm;20≤Width≤180mm Length≤10mm
适用纸卷内径/ Applicable inner diameter of paper	直径Φ76mm
适用纸卷外径/ Applicable outer diameter of paper	最大直径Φ300mm;Max.Φ300mm
使用气源/ Air Source	4-6KG/ 30L/ min
整机尺寸/ Dimension	2000*900*1260mm
适用电压/ Voltage	220V 50Hz 1000W
整机重量/ Weight	200KG

底部平面贴标机

Flat Product Bottom Labeling Machine

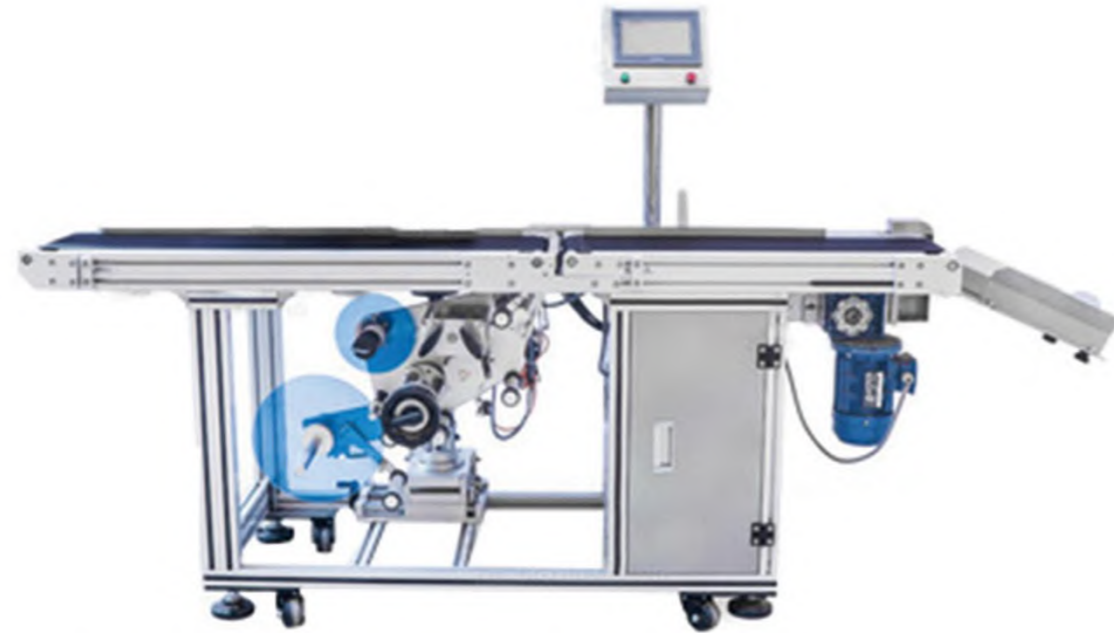

产品介绍/ Description

适用于在各种内陷产品或扁平物表面进行贴标签或防伪标签。主机部分的设计吸收进口机的贴标传送方式，解决了一般国产贴标不稳定的因素，电眼检测，同步器追踪，确保出标速度与输送速度精确同步，同时速度随意可调，调校方便、操作简单。是生产食品、制药、化工、化妆品等企业需要的理想设备。

本机选用中英文人机对话触摸屏，50组资料记忆存储功能，变更产品和标签只需要通过触摸屏调整，就可以改变贴标位置和贴标长度，无须手工调节光纤电眼。

It is suitable for labeling or anti-counterfeiting labels on the surface of various inset products or flat objects. The design of the host part absorbs the labeling transmission method of the imported machine, which solves the unstable factors of general domestic labeling. Electric eye detection and synchronizer tracking ensure accurate synchronization of the labeling speed and the conveying speed. At the same time, the speed can be adjusted at will, and the adjustment is convenient, easy to use. It is an ideal equipment for the production of food, pharmaceuticals, chemicals, cosmetics and other companies.

This machine uses Chinese and English man-machine dialogue touch screen, 50 sets of data memory storage function, change the product and label only need to adjust through the touch screen, you can change the labeling position and labeling length, no need to manually adjust the fiber optic eye.

适用范围/ Application



产品特点/ Features


- 机器使用和调整方便，工人只需简单培训即可独立操作；
- 传动部分全包裹，避免异常发生，更安全；
- 结构紧凑，占地面积小，移动安装方便；
- 机械调整与标签缠绕结构组合的巧妙设计，使不同产品的调整与标签缠绕变得更简单、更省时；
- 贴标平整、不起皱、无气泡、贴标精度高、稳定性好；
- The machine is easy to use and adjust, and workers can operate independently with simple training;
- The transmission part is fully wrapped to avoid abnormalities and make it safer;
- Compact structure, small floor space, easy to move and install;
- The ingenious design of the combination of mechanical adjustment and label winding structure makes the adjustment and label winding of different products easier and more time-saving;
- Smooth labeling, no wrinkles, no bubbles, high labeling accuracy and good stability;

技术参数/ Technical parameters

型号/ Model	LFT-DB-00
贴标速度/ Labeling Speed	10-30米/分钟;10-30meters/ min
贴标精度/ Labeling Accuracy	±1mm(不包含产品和标签错误/Does not contain product and label errors)
标签最大宽度/ Max Label Width	120mm(可按需求增加宽度/ Can be customized)
被贴物尺寸/ Applicable Product Size	直径Φ12-100mm 高度30-200mm;Φ12-100mm Height 30-200mm
适用纸卷内径/ Applicable inner diameter of paper	直径Φ76mm
适用纸卷外径/ Applicable outer diameter of paper	最大直径Φ300mm;Max.Φ300mm
使用气源/ Air Source	4-6KG/ 30L/ min
整机尺寸/ Dimension	2000*800*1650mm
适用电压/ Voltage	220V 50Hz 1000W
整机重量/ Weight	200KG

卧滚式贴标机

Horizontal labeling machine

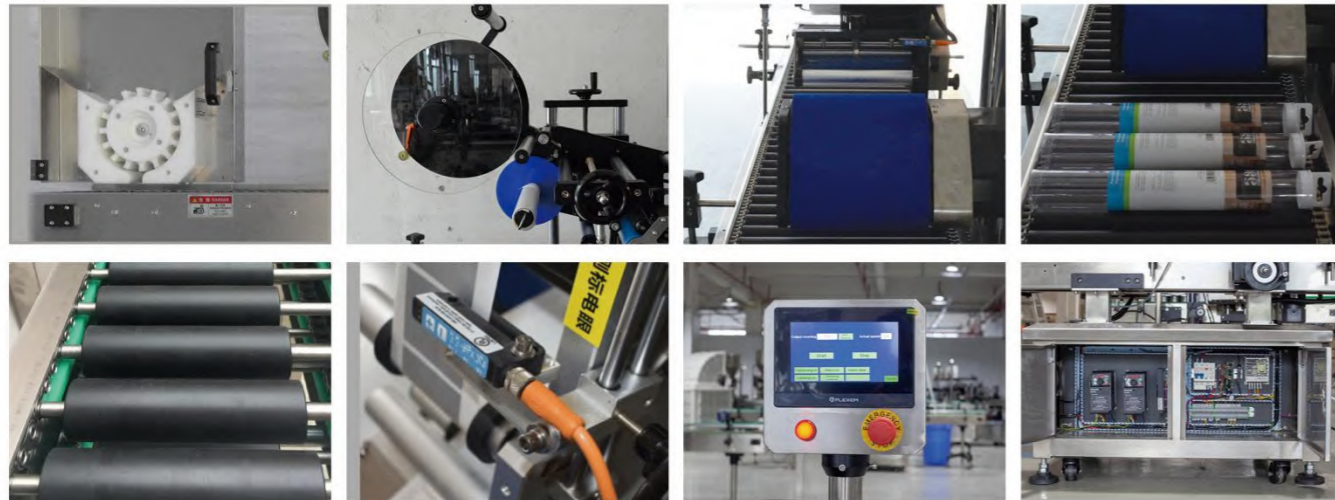

产品介绍/Description

卧式贴标机适用于各种无法站立的圆瓶贴标，可依客户需要搭配、送料、收料结构，机身可设计向前倾斜或向后倾斜，适用小圆瓶直径可依产品的需要设计输送带，使生产线得到最佳效率。自动交替送料机构既确保了供料的快速性，又保证了供料的连续性，使贴标机的生产效率大为提高，方便实用。

The horizontal labeling machine is suitable for labeling various round bottles that cannot stand up. It can be equipped with, feeding and receiving structures according to customer needs. The body can be designed to tilt forward or backward. The diameter of the suitable small round bottle can be based on the product. The conveyor belt needs to be designed to get the best efficiency of the production line. The automatic alternate feeding mechanism not only ensures the rapidity of feeding, but also ensures the continuity of feeding, which greatly improves the production efficiency of the labeling machine, which is convenient and practical.

适用范围/ Application



产品特点/ Features


- 坚固卫生，采用304不锈钢和高级铝合金制造，符合GMP生产规范，结构牢固，美观大方；
- 破瓶率低，应用柔性分瓶和覆标技术，分瓶贴标顺畅，破瓶率低于十万分之一；
- 贴标质量优，采用标带绕行纠偏技术，标签头尾对贴重合度高，贴标平整、无皱褶、无气泡，提升包装质量；
- 稳定性高，全球知名高端品牌组成的高级电控系统，支持设备7×24小时高速运转；
- 智能控制，自动光电追踪，具备无物不贴标，无标自动校正和标签自动检测功能，防止漏贴、标签浪费；
- 多种实用功能，生产计数功能，省电功能，生产数设定提示功能，参数设置保护功能，方便生产管理；
- Solid and hygienic, made of 304 stainless steel and high-grade aluminum alloy, conforming to GMP production specifications, firm structure, beautiful and generous;
- Low bottle breaking rate, using flexible bottle separation and labeling technology, smooth bottle labeling, and the bottle breaking rate is less than one hundred thousandths;
- The labeling quality is excellent, and the label tape bypassing correction technology is adopted, the label head and tail are highly overlapped, and the labeling is flat, without wrinkles, and bubbles, which improves the packaging quality;
- High stability, advanced electronic control system composed of world-renowned high-end brands, supporting high-speed operation of the equipment 7×24 hours;
- Intelligent control, automatic photoelectric tracking, with the functions of nothing but no labeling, no label automatic correction and automatic label detection, to prevent missing labels and label waste;
- A variety of practical functions, production counting function, power saving function, production number setting prompt function, parameter setting protection function, convenient for production management;

技术参数/ Technical parameters

型号/ Model	LFT-WG-00
贴标速度/ Labeling Speed	最快可达300件/分钟;Max.300 pieces/ min
贴标精度/ Labeling Accuracy	±0.5mm(不包含产品和标签错误/Does not contain product and label errors)
标签最大宽度/ Max Label Width	100mm
被贴物尺寸/ Applicable Product Size	直径Φ10-30mm
适用纸卷内径/ Applicable inner diameter of paper	Φ76mm
适用纸卷外径/ Applicable outer diameter of paper	最大直径Φ350mm;Max Φ350mm
使用气源/ Air Source	4-6KG 30L/min
整机尺寸/ Dimension	2000*800*1650mm
适用电压/ Voltage	220V 50Hz 1000W
整机重量/ Weight	350 KG

即时称重贴标机

Real Time Weighing Labeling Machine

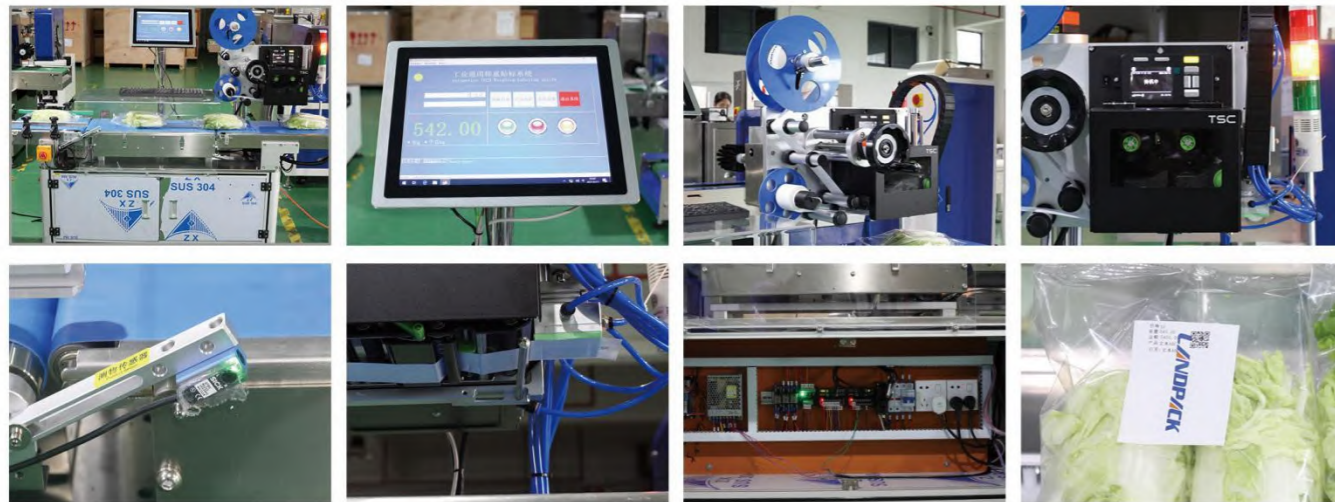

产品介绍/Description

适用于在各种物品的上平面，侧平面贴标签，可同时贴多标，如肉类包装，干果瓶，蔬菜农产品包装膜，纸箱即时打印贴标，大包装袋上面打印贴标、手机盒子条码打印贴标、超市称重打印自动贴价格标贴标等；

It is suitable for labeling on the upper and side surfaces of various items, and can label multiple labels at the same time, such as meat packaging, dried fruit bottles, vegetable and agricultural products packaging film, instant printing and labeling on carton, printing and labeling on large packaging bags, mobile phone box barcodes Printing and labeling, supermarket weighing and printing, automatic price labeling and labeling, etc.;

适用范围/Application



产品特点/Features

- 微软10系统，触摸屏，操作更便捷；
- 配称重系统，在原有的实时打印贴标机的基础上增加了自动称重的功能。完成输出数据实时打印贴标；
- 选配打印机品牌-TSC打印，打印清晰，性能稳定；
- 进口光电，探测更精准；
- Microsoft WINDOWS 10 system, touch screen, more convenient operation;
- Equipped with a weighing system, an automatic weighing function is added on the basis of the original real-time printing and labeling machine. Finish output data real-time printing and labeling;
- Optional printer brand-TSC printing, clear printing and stable performance;
- Imported photoelectric, more accurate detection;

技术参数/Technical parameters

型号/Model	LFT-CZ-00
贴标速度/Labeling Speed	20个/分钟;20pcs/minute
称量范围/Weighing range	3g~5000g
称重精度/Weighing precision	±2-3g
贴标精度/Labeling Accuracy	±3mm不含产品标签误差;±3mm Does not contain product and label errors
适用标签尺寸/Labeling size	L120*W100mm(可按需定制/Can be customized)
台面尺寸/Platform size	缓冲段长 L700mm W300mm;Buffer section L700mm W300mm
称重段/Weighing section	L700mm W300mm
被测产品尺寸/Applicable Product Size	L500mm W280mm
工作温度/Operating temperature	从0°C 到40°C
使用气源/Air Source	4-6 KG 30L/min
整机尺寸/Dimension	2000*800*1600mm
适用电压/Voltage	800W/220V/50HZ
整机重量/Weight	150KG