



佛山市揽德包装机械有限公司
FOSHAN LAND PACKAGING MACHINERY CO.,LTD

📍 地址：佛山市南海区罗村新光源产业基地C7栋
Add : Building C7 of New Lighting Source Industrial Base.
Luocun,Nanhai District,Foshan City,GD,China

☎ Tel : 0757-81807872 Fax : 0757-81807758

✉ E-mail : yang@landpacking.com

🌐 Web : www.landpack.cn / www.landpack.com

LANDPACK

佛山市揽德包装机械有限公司

FOSHAN LAND PACKAGING MACHINERY CO.,LTD

揽德包装机械有限公司坐落于广东省佛山市，以其优越的地理位置和良好的市场口碑，赢得广大客户的支持。公司销售网络辐射全国各地，远销全球30多个国家和地区。

本公司是研发、制造和销售各种液体灌装机、颗粒灌装机、粉末灌装机、封口机、封尾机和贴标机等相关设备,并提供全自动包装生产线整线设计和整体解决方案的现代化包装设备企业。

公司通过ISO9001质量管理体系认证,相关设备通过CE、SGS等认证。配备有丰富经验的研发、制造工程师队伍和专业的销售服务团队,确保您用合理的成本,获得性能稳定,外观卓越和人性化程度高的设备和优质满意的服务体验。

设备广泛适用于食品、中药材、饮料和农产品等相关行业的产品包装和各种制罐厂的生产中。

揽德包装机作为国内先进包装设备制造厂商，致力于为企业 提供包装整体解决方案，令企业所需包装的过程得到质的提升，最大限度地解放了劳动力，避免了二次污染，以高效的方式提高企业的生产率。

LANDPACKAGING MACHINERY CO., LTD. IS LOCATED IN FOSHAN CITY, GUANGDONG PROVINCE. WITH ITS SUPERIOR GEOGRAPHICAL LOCATION AND GOOD MARKET REPUTATION, IT HAS WON THE SUPPORT OF CUSTOMERS. THE COMPANY'S SALES NETWORK RADIATES ALL OVER THE COUNTRY AND IS EXPORTED TO MORE THAN 30 COUNTRIES AND REGIONS AROUND THE WORLD.

THE COMPANY IS A MODERN PACKAGING EQUIPMENT ENTERPRISE WHICH DEVELOPS, MANUFACTURES AND SELLS ALL KINDS OF LIQUID FILLING MACHINES, PARTICLE FILLING MACHINES, POWDER FILLING MACHINES, SEALING MACHINES, TAIL SEALING MACHINES AND LABELING MACHINES, AND PROVIDES FULL-AUTOMATIC PACKAGING PRODUCTION LINE DESIGN AND OVERALL SOLUTIONS.

THE COMPANY HAS PASSED ISO 9001 QUALITY MANAGEMENT SYSTEM CERTIFICATION, AND RELEVANT EQUIPMENT HAS PASSED CE AND SGS CERTIFICATION. EQUIPPED WITH A TEAM OF EXPERIENCED R & D AND MANUFACTURING ENGINEERS AND A PROFESSIONAL SALES AND SERVICE TEAM, YOU CAN GET STABLE PERFORMANCE, EXCELLENT APPEARANCE AND HIGH DEGREE OF HUMANIZATION EQUIPMENT AND HIGH QUALITY AND SATISFACTORY SERVICE EXPERIENCE AT REASONABLE COST.

THE EQUIPMENT IS WIDELY USED IN FOOD, CHINESE HERBAL MEDICINE, BEVERAGE, AGRICULTURAL PRODUCTS AND OTHER RELATED INDUSTRIES OF PRODUCT PACKAGING AND VARIOUS CANNERY PRODUCTION.


企业简介




CE 认证



ISO 认证

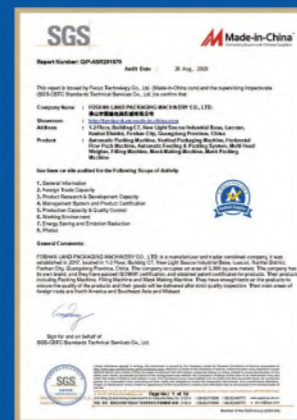

SGS 认证

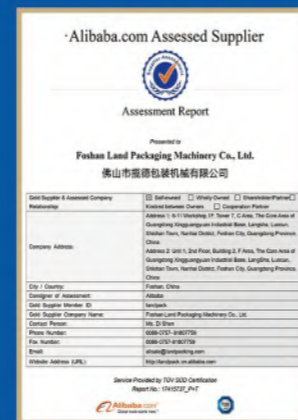

TUV 认证



LD-480Y/720Y/960Y 四边封多列液体包装机

Four side sealing multi row liquid packaging machine



适用范围/Application



适用于液体类包装：酱，蜂蜜，油，果冻，洗发水，面霜等；
Suit for granule : sauce, honey, oil, jelly, shampoo, facial cream, etc;

样品/Sample



技术参数/Technical parameter

型号 Model	LD-480Y	LD-720Y	LD-960Y
列数 Track number	4~6 列(Track)	4~10 列(Track)	4~12 列(Tmck)
计量方式 Filling Method	1.活塞泵 Piston pimq 2.蠕动泵 Peristaltic pump		
包装速度 Charity	每分钟最大 40 切 Max.40 cycle/min		
制袋尺寸 Bag size	L:45-120mm; W:35-60mm	L:45-120mm; W:35-90mm	L:45-120mm; W:35-120mm
膜宽膜厚 Film W&D	Max.480mm; 0.07-0.1mm	Max.720mm; 0.07-0.1mm	Max.960mm; 0.07-0.1 mm
封口形式 Sealing type	四边封 4 sides sealing		
气压功率 Air & Power	0.8 MPA0.8m3/min; 2.8KW	0.8 MPA0.8m3/min; 4.1KW	0.8 MPA0.8m3/min; 5.5KW
尺寸重量 DIM & WT	950*1470*1750mm; 300kg	1153* 1654* 1750mni; 400kg	1415* 1686*2130mm; 500kg

LD-480G/720G/960G 四边封多列颗粒包装机

Multi Track Side Sealing Bag Granule Packing Machine



适用范围/Application



适用于颗粒状:盐，砂糖，咖啡，调味料,洗衣粉等；
Suit for granule : salt,sugar,coffee,spice, washing powderetc;

样品/Sample



技术参数/Technical parameter

型号 Model	LD-480G	LD-720G	LD-960G
列数 Track number	4~6 列(Track)	4~10 列(Track)	4~12 列(Tmck)
计量方式 Filling Method	量杯 Volumetric cup		
包装速度 Charity	每分钟最大35切 Max.35 cycle/min		
制袋尺寸 Bag size	L:45-120mm; W:35-60mm	L:45-120mm; W:35-90mm	L:45-120mm; W:35-120mm
膜宽膜厚 Film W&D	Max.480mm; 0.07-0.1mm	Max.720mm; 0.07-0.1mm	Max.960mm; 0.07-0.1 mm
封口形式 Sealing type	四边封 4 sides sealing		
气压功率 Air & Power	0.8 MPA0.8m3/min; 2.8KW	0.8 MPA0.8m3/min; 4.1KW	0.8 MPA0.8m3/min; 5.5KW
尺寸重量 DIM & WT	950*1470*1750mm; 300kg	1153* 1654* 1750mni; 400kg	1415* 1686*2130mm; 500kg

LD-480F/720F/960F 四边封多列粉体包装机

Multi Track Side Sealing Bag Powder Packing Machine



适用范围/Application



适用于粉状: 面粉, 蛋白粉, 奶粉, 葡萄糖粉, 药粉等;

Suit for powder : flour, albumen powder, milk powder, glucose, medical powder;

样品/Sample



技术参数/Technical parameter

型号 Model	LD-480F	LD-720F	LD-960F
列数 Track number	4~6 列(Track)	4~10 列(Track)	4~12 列(Tmck)
计量方式 Filling Method	1.活塞泵 Piston pimq 2.蠕动泵 Peristaltic pump		
包装速度 Charity	每分钟最大 40 切 Max.40 cycle/min		
制袋尺寸 Bag size	L:45-120mm; W:35-60mm	L:45-120mm; W:35-90mm	L:45-120mm; W:35-120mm
膜宽膜厚 Film W&D	Max.480mm; 0.07-0.1mm	Max.720mm; 0.07-0.1mm	Max.960mm; 0.07-0.1 mm
封口形式 Sealing type	四边封 4 sides sealing		
气压功率 Air & Power	0.8 MPA0.8m3/min; 2.8KW	0.8 MPA0.8m3/min; 4.1KW	0.8 MPA0.8m3/min; 5.5KW
尺寸重量 DIM & WT	950*1470*1750mm; 300kg	1153*1654*1750mm; 400kg	1415*1686*2130mm; 500kg

LD-280BY/560BY 背封液体多列包装机

Multi-Lane Back Sealing Liquid Packing Machine



适用范围/Application



适用于液体类包装: 酱, 蜂蜜, 油, 果冻, 洗发水, 面霜等;

Suit for granule : sauce, honey, oil, jelly, shampoo, facial cream, etc;

样品/Sample



技术参数/Technical parameter

型号 Model	LD-280BY	LD-560BY
列数 Track number	4~6 列(Lane)	8~12 列(Lane)
计量方式 Filling Method	1.量杯 Volumetric cup 2.电子秤 weigher	
包装速度 Charity	每分钟最大35切; Max.35 cycle/min	
制袋尺寸 Bag size	L: 50-180mm; W:17-30mm	L:50-180mm; W:17-30mm
膜宽膜厚 Film W&D	Max. 280mm,0.07-0.10mm	
封口形式 Sealing type	背封 Backsealing/Stick bag	
切口形式 Cutting type	1.平口切 Straight cutting 2.锯齿切 Zig zag cutting 3.圆角切 Round cutting	
气压功率 Air & Power	0.8Mpa 0.8m3/min; 3.5kw	0.8Mpa 0.8m3/min; 5.5kw
尺寸重量 DIM & WT	1385*918*2005mm; 350kg	1685*1300*2005mm; 550kg

LD-280BK/560B 背封颗粒多列包装机

Multi-Lane Back Sealing Granule Packing Machine



适用范围/Application



适用于颗粒状:盐, 砂糖, 咖啡, 调味料, 洗衣粉等;
Suit for granule : salt, sugar, coffee, spice, washing powder etc;

样品/Sample



技术参数/Technical parameter

型号 Model	LD-280BK	LD-560BK
列数 Track number	4~6 列(Lane)	8~12 列(Lane)
计量方式 Filling Method	1.量杯 Volumetric cup 2.电子秤 weigher	
包装速度 Charity	每分钟最大35切; Max.35 cycle/min	
制袋尺寸 Bag size	L: 50-180mm; W:17-30mm	L:50-180mm; W:17-30mm
膜宽膜厚 Film W&D	Max. 280mm,0.07-0.10mm	Max.560mm,0.07-0.10mm
封口形式 Sealing type	背封 Backsealing/Stick bag	
切口形式 Cutting type	1.平口切 Straight cutting 2.锯齿切 Zig zag cutting 3.圆角切 Round cutting	
气压功率 Air & Power	0.8Mpa 0.8m3/min; 3.5kw	0.8Mpa 0.8m3/min; 5.5kw
尺寸重量 DIM & WT	1385*918*2005mm; 350kg	1685*1300*2005mm; 550kg

LD-280BF/560BF 背封粉末多列包装机

Multi-Lane Back Sealing Powder Packing Machine



适用范围/Application



适用于粉状: 面粉, 蛋白粉, 奶粉, 葡萄糖粉, 药粉等;
Suit for powder : flour, albumen powder, milk powder, glucose, medical powder;

样品/Sample



技术参数/Technical parameter

型号 Model	LD-280BF	LD-560BF
列数 Track number	4~6 列(Lane)	8~12 列(Lane)
计量方式 Filling Method	1.量杯 Volumetric cup 2.电子秤 weigher	
包装速度 Charity	每分钟最大35切; Max.35 cycle/min	
制袋尺寸 Bag size	L: 50-180mm; W:17-30mm	L:50-180mm; W:17-30mm
膜宽膜厚 Film W&D	Max. 280mm,0.07-0.10mm	Max.560mm,0.07-0.10mm
封口形式 Sealing type	背封 Backsealing/Stick bag	
切口形式 Cutting type	1.平口切 Straight cutting 2.锯齿切 Zig zag cutting 3.圆角切 Round cutting	
气压功率 Air & Power	0.8Mpa 0.8m3/min; 3.5kw	0.8Mpa 0.8m3/min; 5.5kw
尺寸重量 DIM & WT	1385*918*2005mm; 350kg	1685*1300*2005mm; 550kg

LD-500YS 异形袋多列液体包装机

Special shaped bag multi row liquid packaging machine



适用范围/ Application



适用于液体类包装：酱，蜂蜜，油，果冻，洗发水，面霜等；
Suit for granule : sauce, honey, oil, jelly, shampoo, facial cream, etc;

样品/ Sample



技术参数/ Technical parameter

型号 Model	LD500YS
列数 Track number	2~4 列(Track)
包装速度 Charity	每分钟大概 20-30 切; 20-30 cycle/min
制袋尺寸 Bag size	L: 50-170mm, W:70-230mm
封口形式 Sealing type	异形袋 Irregular shape bag
膜宽膜厚 Film width&Thickness	Max.500mm, 0.07—0.10mm
计量方式 Filling method	1.活塞泵 Piston pump, 2.蠕动泵 Peristaltic pump
气压功率 Air & Power	220V/380V 50HZ,5.0KW
耗气量 Air consumption	0.8Mpa,0.8m3/min
尺寸重量 DIM & WT	2600*1350*2350mm, 800kg

输送机系统

Conveyor series



Z型物料输送机 Z-Type Bucket Elevator

主要性能和结构特点

- 适合于输送易碎物料
- 采用国家级食品塑料，保障食品安全
- 规格可按客户要求定做
- 性能稳定，噪音小
- 安装拆卸简单，方便清洗
- 结构简单，价格便宜

适用范围

- 通过链条的传动，带动料斗提升，适用于粮食，食品，饲料和化工等部门的片状，块状的升运。

Technical advantages

- Suitable to transport the materials which is easy crash.
- Adopt the food safety class plastic, to ensure the food safety.
- Easy to washing.
- work stable low noise.

Application

Suitable to deliver sheet, massive material etc. Such as food, feed and chemical industry. Conveyor to work through the chain of transmission with large lifting quantity and high lifting height.



螺杆提升机 Screw auger conveyor

主要性能和结构特点

- 采用螺杆计量机完成计量、填充等，适用于计量粉状物料。
- 应用范围广
- 结构简单，安装维护方便

适用范围

- 主要应用于块状，颗粒类食品以及包装成品的输送。

Technical advantages

- By screw machine complete measuring, filling, etc., suitable for measuring powder material.
- Simple structure, easy to install.
- Economical, wide range of applications.

Application

- This conveyor is mainly used in bulk, grain food and the finished product.



成品输送机&成品转盘
Finished Product Conveyor Turn Table

主要性能和结构特点

- 有不锈钢和喷漆两种材质可供选择
- 有皮带和链板材质可供客户选择
- 可调节高度，0.55-0.8M (据型号而定)
- 成品转盘采用304#不锈钢，具备360度旋转功能

适用范围

- 适用于包装好的成品袋输送至包装后检测设备或打包平台。

Technical advantages

- There are stainless steel frame and painted frame for choose.
- Belt and chain plate for customer to choose.
- The height of the finished product conveyor can be adjusted, the range is 0.55-0.8 (depend on different model).
- Turn table made with 304 stainless steel, 360° turn.

Application

- Transport the finished products to the inspection equipments or the package platform.



真空上料机 Vacuum Conveyor

主要性能和结构特点

- 上料速度快
- 连续工作长时间
- 无泄漏现象，清洁、卫生，适合于洁净厂房
- 操作简单，拆装和清洗方便，符合卫生要求

Technical advantages

- Feeding speed is fast.
- Simple structure, easy to install.
- No leakage, clean hygiene.
- Easy operation.



成品输送机 Finished product conveyor

主要性能和结构特点

- 线速度：18米/分钟
- 机架材质：机架采用304不锈钢，传动部分采用钢件表面处理镀铬或者发黑及铝型材，与食品接触部分采用食品级304不锈钢材质。

Technical advantages

- Line speed: 18 m/ min
- Finished product conveyor frame material: it is made of 304 stainless steel, and the transmission part is made of steel surface treated with nickel or black and aluminum profiles, the contact food part is made of food grade 304 stainless steel.